



## Dimensions


■ WYTY4241A

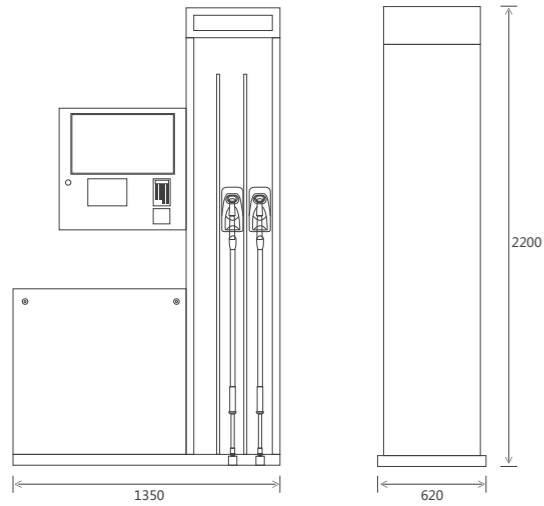


■ WYTY6361A

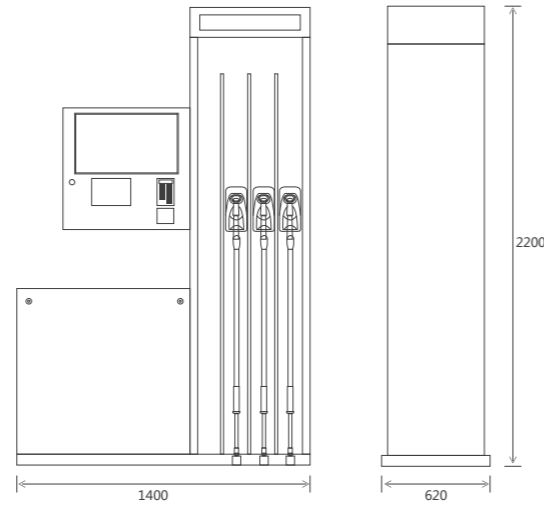


■ WYTY4241B

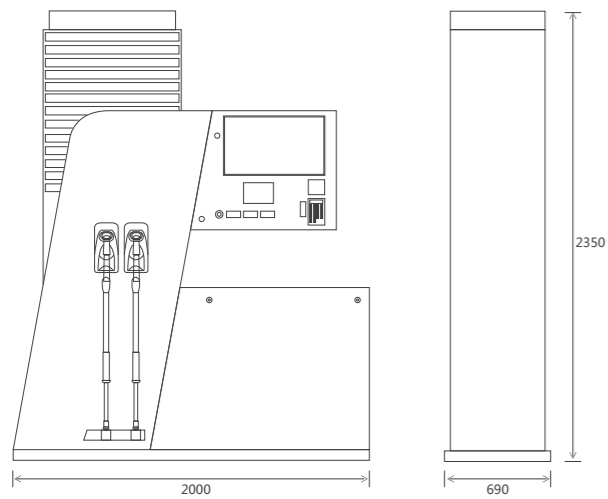

■ WYTY6361B

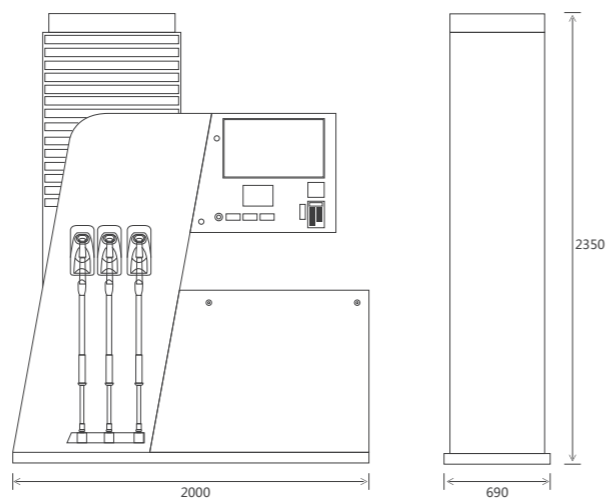

 We reserve the right to change the specifications and designs for improvement without prior notice.

### JAPAN ENERJUMP Co., Ltd.

2-4-12 KW build.4F, Nihonbashi-kakigaracho, Chuo-ku, Tokyo 103-0014 JAPAN

TEL: 03-6661-1807 FAX: 03-5651-3213

<http://www.enerjump.co.jp/> E-mail: [info@enerjump.co.jp](mailto:info@enerjump.co.jp)



MODEL   
• WINDY SERIES

# WINDY SERIES

(ウインディー シリーズ)



## Main Specifications

	Suction Pump Type	Submersible Turbine Pump (STP)Type
Flow Rate	Normal:50L/min High:70L/min Ultra-high:90L/min	Depends on the on-site STP capacity
Pump	Internal silent gear pump with air separator Suction strainer, Flexible pipe By-pass valve and Suction check value	
Flexible Pipe	Flange type, 1-1/2" threaded	
Maunal Drive Handle	Provided for maunal operation during power failure	
Motor	Three-phase 380V 750W (Optional) Single-phase 220-240V 750W	
Meter	4-piston positive displacement flowmeter with electronic adjuster	
Accuracy	±0.3%	
Counter	Type	LCD
	Character Color	Black characters on a blue field with bright LED back light (Optional) White/Yellow/Orange back light
Counter	Display	Sale: 8 digits[0.01~999,999.99] Liter: 8 digits[0.01~999,999.99] Unit Price: 5 digits[0.01~999.99]
	Machinery Totalizer	8 digits
	Electronic Totalizer	(Optional) 8 digits
Counter	Other Funtions	Battery back-up (Optional) Self-diagnosis (Optional) Over voltage protector
	Reset Device	Automatic reset
	Nozzle	Automatic nozzle, Spout outside diameter 21mm, 25mm
Hose	Black color hose, Oil resistance type, Inside diameter 16mm (Optional) Red/Yellow/Green color hose	
Safty Breakaway Couping	Provided	
Wiring	(Optional) Cabtyre cable	
Emergency Stop Switch	Provided	
POS Interface	(Optional)	
Line Fuel Filter	(Optional)	
Anti Static Touch Pad	(Optional)	
Sight Glass	(Optional)	
Receipt Printer	(Optional)	
AD Display	(Optional)	
LED Message Board	(Optional)	
Ambient Temperature	-40 to+ 60°C	
Noise	≤ 80dB (A)	
Inlet Vacuum	≥ 0.06MPa	

Wiring	WYTY4241A	WYTY6361A	WYTY4241B	WYTY6361B
Apperance				
System diagram				
Dimensions	1350W*2200H*620D	1400W*2200H*620D	2000W*2350H*690D	2000W*2350H*691D
weight	200kg	235kg	325kg	550kg